



## SPECIFICATIONS


Product Description: **VENTILATION BLOWER, STANDARD**  
Part Number: **9515**  
Style: **AXIAL FAN 16"**

### GENERAL DESCRIPTION:

For applications requiring a large amount of output. Standard is a ½ HP motor with an efficient six-blade impeller in a rugged metal housing.

### CONSTRUCTION:

- Complete unit epoxy powder coated in orange
- Interchangeable flange for intake or exhaust side mounting
- 18 gauge cold rolled steel housing
- Integrated carrying handles on four sides
- Steel/chrome plated grill
- Equipped with four rubber feet
- Stackable design
- Can be used with Adaptor Reducer (PN: 9600-50) used with 8" ducting

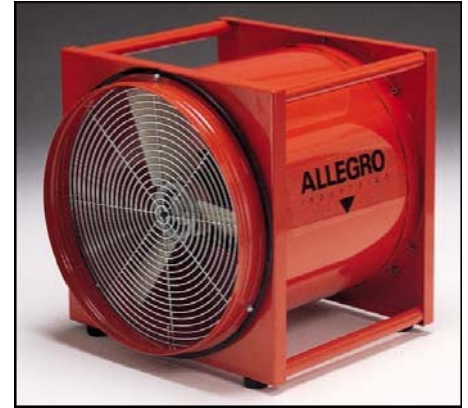

### MOTOR:

HP: ½ HP  
Certifications: UL Recognized, CSA Certified  
Voltage/Hz: 115V AC, 60 Hz, Single Ø  
RPM : 3450  
Current Draw: 6.3 A  
Cord: 25' 12/3 AWG, SJTW 90C 300V medium duty  
Plug: NEMA 5-15 (Grounded three-prong)

### FAN:

- Glass reinforced Polypropylene (PPG) six blade fan, with aluminum hub
- Moving fan mounted 1 5/8" from grill for safety, grill gap-5/16"

### DUCTING:

- Retractable, non-collapsible design
- Single-ply, PVC coated, vinyl and polyester materials, temperature resistant up to 180°F
- Class 1 hard drawn spring steel wire helix that meets ASTM 227 specs

### BLOWER DIMENSIONS:

Length	Width	Height	Weight
14"	18"	18"	47 lbs

### FLOW RATES: (CFM calculated using 15' of 16" ducting)

Free Air	One 90° Bend	Two 90° Bends
3400 CFM	2800 CFM	2300 CFM